Telescopic Boom Lifts CE, UKCA

# Genie® S®-60 J

## **Specifications**

Models	S-60 J	
Measurements	US	Metric
Working height max.(1)	66 ft 10 in	20.50 m
Platform height max.	60 ft 10 in	18.50 m
Horizontal reach max.	40 ft 6 in	12.30 m
Platform length (8 ft/6 ft)	3 ft/2 ft 6 in	0.91 m/0.76 m
B Platform width (8 ft/6 ft)	8 ft/6 ft	2.44 m/1.83 m
• Height - stowed	8 ft 10 in	2.69 m
<ul><li>Length - stowed</li></ul>	31 ft 10 in	9.70 m
<ul><li>Length - storage/transport (jib tucked under)</li></ul>	23 ft 6 in	7.16 m
Width	8ft 2in	2.49 m
• Wheelbase	8ft	2.44 m
G Ground clearance - center	1 ft 10 in	0.56 m
1 Height under counterweight	3ft 4in	1.02 m

#### **Productivity**

Lift capacity max unrestricted	660 lb	300 kg
Number of Platform Occupants	2	
Platform rotation	160°	
Jib length	6 ft	1.83 m
Vertical jib rotation (up/down)	130°	
Turntable rotation	353°	
Turntable tailswing	5 ft 2 in	1.57 m
Drive speed - stowed	3 mph	4.82 km/h
Drive speed - raised	0.68 mph	1.1 km/h
Gradeability - stowed <sup>(2)</sup>	45 %	
Tilt sensor activation (front to back/side to side)	5°/5°	
Turning radius - inside/outside	8ft 1 in/18ft 5 in	2.46 m/5.61 m
Tires	315/55D20	

#### **Power**

Power	Diesel	
Hydraulic tank capacity	21 gal	79 L
Fuel tank capacity	30 gal	114L


## Weight(3) and Floor Loading(4)


Weight	16,650 lb	7,550 kg
Tire contact pressure	85 psi	585 kPa
Occupied floor pressure	215 psf	10.28 kPa

#### Sound and Vibration Levels

Oddia dia Vibiation Ecvolo		
Sound Pressure level (ground workstation)	83 dBA	
Sound Pressure level (platform workstation)	77 dBA	
Vibrations	< 2.5 m/s <sup>2</sup>	

## Range of motion S-60 J

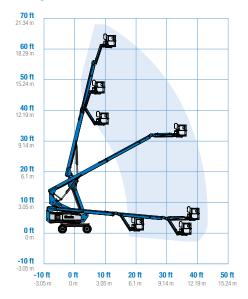









<sup>(1)</sup> The metric equivalent of working height adds 2m to platform height. The imperial equivalent adds 6ft to

<sup>(1)</sup> The Heithe equivalent of working height adds 21th to platform height. The imperial equivalent adds of to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Weight refers to standard configuration and may vary depending on options and/or country standards.
(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Telescopic Boom Lifts CE, UKCA

# Genie® S®-60 J

#### **SKU:** Standard Model

- S60J0001CF0001: S-60 J, 24 hp, Stage IIIA/V, 220V, 4WD
- **\$60J0001CF0007:** S-60 J, 24 hp, Stage IIIA/V, 110V, Lift Power 3kW, 4WD
- \$60J0001Cl0005: S-60 J, 49 hp, Stage IIIA, 220V, 4WD
  - \* Build to Order

## SKU: Standard Model

- \$60J0001CV0002: S-60 J, 49 hp, 220V, 4WD
- S60J0001CV0008: S-60 J, 49 hp, 110V, Lift Power 3kW, 4WD









660lb/300kg Capacity Low Transport Weight Jib

Simple Design & Maintenance




# Genie Genuine Accessories<sup>(1)</sup>

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

06/23 GEN227

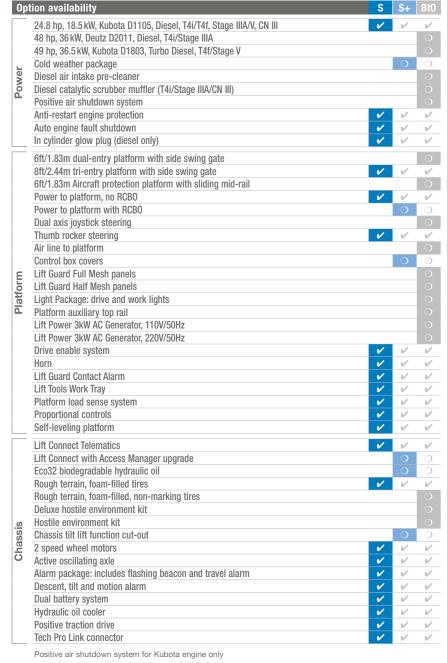

WWW.HDW-INTL.COM

TEL NL: +31 (0)186-277000 TEL BE: +32 (0) 168-17081 TEL PL: +48 (22) 290-339



