Articulated Boom Lifts CE, UKCA

Genie® Z®-45 DC & Z-45 FE

Specifications

Models	Z-45 DC & Z-45 FE	
Measurements	US	Metric
Working height max.(1)	51 ft 8 in	15.92 m
Platform height max.	45 ft 8 in	13.92 m
Horizontal reach max.	22 ft 9 in	6.94 m
Up and over clearance max.	24 ft 7 in	7.50 m
Platform length	2ft 6in	0.76 m
3 Platform width	6ft	1.83 m
Height - stowed	7 ft 6 in	2.29 m
Length - stowed	20 ft 1 in	6.11 m
(3) Width	7 ft 6 in	2.29 m
Wheelbase	6 ft 8 in	2.03 m
G Ground clearance - center	1 ft 4 in	0.41 m

Productivity

1 Toudouvity				
Lift capacity max unrestricted	660 lb	300 kg		
Platform rotation	160°			
Jib length	5 ft	1.52 m		
Vertical jib rotation	135°			
Turntable rotation	355°			
Turntable tailswing	1 ft 3 in	0.37 m		
Drive speed - stowed ⁽²⁾	4.5 mph	7.24 km/h 0.50 km/h		
Drive speed - raised	0.31 mph			
Gradeability - stowed ⁽²⁾	45 %			
Tilt sensor activation (front to back/side to side)	4.5°/4.5°			
Turning radius - inside/outside	7ft 10in/14ft 1in	2.40 m/4.30 m		
Tires	315/55 D20			

Power


Drive system	34V 3-Phase AC	34V 3-Phase AC 34V 3-Phase AC			
Battery Pack, DC	48V DC (8×6V),	48V DC (8×6V), 390Ah, FLA			
Battery Pack, FE	48V DC (8×6V), 370Ah, AGM				
AC generator, FE	Diesel				
Auxiliary power unit	12V DC				
Hydraulic tank capacity	10.5 gal	40 L			
Fuel tank capacity	17 gal	64 L			

Weight(3) and Floor Loading(4)

g aa		
Weight, DC	14,064 lb	6,379 kg
Weight, FE	14,460 lb	6,559 kg
Tire contact pressure	70 psi	482 kPa
Occupied floor pressure (tires)	206 psf	9.88 kPa

Sound and Vibration Levels

South and Vibration Levels		
Sound Pressure level (ground workstation)	70 dBA (DC)/8	0 dBA (FE)
Sound Pressure level (platform workstation)	70 dBA (DC)/76 dBA (FE)	
Vibrations	1.81 ft/s ²	0.55 m/s ²





- (1) The metric equivalent of working height adds 2m to platform height. The imperial equivalent adds 6ft to
- platform height.
 (2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations.
- (a) Gradeability applies to inviting on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.


 (3) Weight refers to standard configuration and may vary depending on options and/or country standards.

 (4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

HDW



Range of motion Z-45 DC & FE

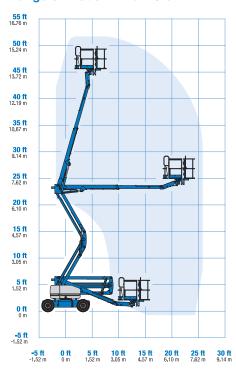

Articulated Boom Lifts CE, UKCA

Genie® Z®-45 DC & Z-45 FE

SKU: Standard Model

- Z-45 DC, DC Power, 110V, 4WD*
- Z-45 DC, DC Power, 220V, 4WD*
 - * Build to Order

SKU: Standard Model

- **Z45FE001CE0001:** Z-45 FE Hybrid, 110V, 4WD
- **Z45FE001CE0002:** Z-45 FE Hybrid, 220V, 4WD
- Z45FE001CE0003: Z-45 FE Hybrid, 220V, Control box cover, 4WD

0p	tion availability	S	S+	Bt0
	25.2 hp, 18.8 kW, Kohler KDW1404, Diesel, Stage IIIA/V (FE model only)	~	V	
Power	FLA flooded lead acid batteries (Optional on FE)	~	V	
	AGM Maintenance-free batteries (Optional on DC)	~	V	
	Cold weather package		0	
	Power inverter, 2kW, 110V/50Hz			0
	Power inverter, 2kW, 240V/50Hz			
	Low voltage interrupt (LVI) with battery charge indicator (BCI)	V	V	V
	6ft/1.83m dual-entry platform with side swing gate	V	V	V
	Power to platform with RCBO	V	V	V
	Air line to platform			
	Control box covers			0
	Lift Guard Full Mesh panels			
	Lift Guard Half Mesh panels			
	Light Package: drive and work lights			
	Platform auxiliary top rail			
_	Platform level cutout		0	0
Platform	5ft/1.52m Jib	V	V	V
Ę	AC Power cord to platform	V	V	V
Pla	Alarm package: flashing beacons, descent, travel and tilt alarms	V	V	V
	Drive enable system	~	V	V_
	Horn	~	V	V_
	LCD display	V	V	V
	Lift Guard Contact Alarm	<u> </u>	V	
	Lift Tools Work Tray	<u> </u>	V	
	Platform load sense system	<u> </u>	V	
	Proportional controls	<u> </u>	V	
	Self-leveling platform	<u> </u>	V	
	Thumb rocker steering	V	V	
	Lift Connect Telematics		0	0
	Telematics-ready	V	V	V_
	Lift Connect with Access Manager upgrade		0	0
<u>.s</u>	Eco32 biodegradable hydraulic oil			0
	Rough terrain, foam-filled tires			0
	Rough terrain, foam-filled, non-marking tires	V	V	V
388	Chassis tilt lift and drive function cut-out		0	0
Chassis	Active oscillating axle	V	V	V
	Chassis tilt drive function cut-out	V	V	
	Dual parallelogram lift linkage	<u> </u>	V	
	Electric brake release	<u> </u>	V	
	Hour meter	<u> </u>	V	
	On-board diagnostic system	<u> </u>	V	
	Sealed AC electric drive motors	V	V	

Engine make and model subject to availability

S Standard
S+ Standard +
BtO Build to Order
Standard Features
Options







Indoor & Outdoor Boom

Rugged Terrainability

660lb/300kg Capacity Jib



Genie Genuine Accessories(1)

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

6/23 GEN2245



