Technical sheet:

MRT 3060


VISION +







0		N. C.	
Capacities		Metric	Imperial
Max. capacity		6000 kg	13228 lb
Max. lifting height		29.90 m	98 ft 1 in
fax. outreach		25.90 m	85 ft
Veight and dimensions			
verall length (with forks)	l1	9.14 m	30 ft
ength to face of forks	12	7.94 m	26 ft 1 in
verall width	b1	2.50 m	8 ft 2 in
verall height	h17	3.10 m	10 ft 2 in
verall cab width	b4	0.96 m	3 ft 2 in
round clearance	m4	0.38 m	1 ft 3 in
/heelbase		3.25 m	10 ft 8 in
	y a4	12 °	12 °
ilt-up angle			
ilt-down angle	a5	110 °	110 °
urret rotation (Max.)		360 °	360 °
verall weight		21800 kg	48061 lb
orks length / width / section	l/e/s	1200 mm x 100 mm x 60 mm	47 in x 4 in x 2 in
'heels			
tandard tyres		445/65 R22,5	445/65 R22,5
rive wheels (front / rear)		2/2	2/2
eering mode		2 wheel steer, 4 wheel steer, Crab mode	2 wheel steer, 4 wheel steer, Crab mode
tabilisers			
tabs Type		Telescopic Duplex	Telescopic Duplex
ontrols with stabs		Stabs Commands Individual or Simultaneous	Stabs Commands Individual or Simultaneous
		Stabs Commands individual of Simultaneous	Stabs Commands individual of Simultaneous
ngine		V	
ngine brand		Yanmar	Yanmar
ngine norm		Stage V / Tier 4	Stage V / Tier 4
ngine model		4TN107FTT-6SMU1	4TN107FTT-6SMU1
C. Engine power rating / Power (kW)		173 Hp / 127 kW	173 Hp / 127 kW
fax. torque / Engine rotation (min)		805 Nm @ 1500 rpm	594 ft/lbs @ 1500 rpm
lumber of cylinders - Capacity of cylinders		4 - 4567 cm ³	4 - 279 in³
lectric circuit			
lumber of batteries / Battery		2 x 12 V	2 x 12 V
attery capacity		120 Ah	120 Ah
attery starting current		(EN)850 A	(EN)850 A
ransmission		(21.1)000 71	(2.1.) 000 / 1
		Hudrostatio with Chandahift	Hydrostotic with Chandohift
ransmission type		Hydrostatic with Speedshift	Hydrostatic with Speedshift
earbox / Number of gears (forward) / Number of gears (reverse)		Speedshift/2 / 2	Speedshift/2 / 2
lax. travel speed		40 km/h	25 mi/h
rawbar pull		9200 daN	9200 daN
arking brake		Automatic negative parking brake	Automatic negative parking brake
ervice brake		Oil-immersed multi-discs braking on front & rear	Oil-immersed multi-discs braking on front & re
		axles	axles
erformances			
radeability (laden / unladen)		32.40 % / 41.40 %	32.40 % / 41.40 %
ydraulics			
lydraulic pump type		Variable displacement pump	Variable displacement pump
ydraulic flow		185 l/min	49 US gpm
ydraulic Pressure		350 bar	5076 PSI
ank capacities			
ngine oil		13 I	3 US gal
ydraulic oil		300 I	79 US gal
uel tank		320	85 US gal
		24	· ·
iesel Exhaust fluid (AdBlue® type)		Z4 I	6 US gal
oise and vibration			
oise at driving position (LpA)		67 dB	67 dB
nvironmental noise (LwA)		108 dB	108 dB
ibration to whole hand/arm		< 2.50 m/s ²	< 2.50 m/s ²
fiscellaneous			
teering wheels (front / rear)		2 / 2	2/2
ontrols		2 Joysticks	2 Joysticks
afety cab homologation		Cabin ROPS - FOPS Level 2	Cabin ROPS - FOPS Level 2

MRT 3060 - Dimensional drawing









Other data		Metric	Imperial
Length of frame	l14	5.92 m	19 ft 5 in
Wheelbase	у	3.25 m	10 ft 8 in
Ground clearance	m4	0.38 m	1 ft 3 in
Counterweight offset (turret at 90°)	a7	3.45 m	11 ft 4 in
Tilt-up angle	a4	12 °	12 °
Tilt-down angle	a5	110 °	110 °
Overall length at stabilisers	l12	5.62 m	18 ft 5 in
External turning radius (over tyres)	Wa1	4.63 m	15 ft 2 in
Overall width with stabilisers extended	b7	6.06 m	19 ft 11 in
Overall height	h17	3.10 m	10 ft 2 in
Frame levelling corrector	a9	+/- 7 °	+/- 7 °
Ground clearance under front tires on stabilizers	m5	0.45 m	1 ft 6 in

MRT 3060 - Load chart

Machine on tyres with forks Metric

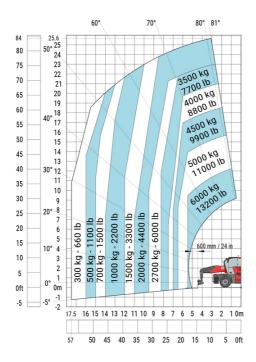



Machine on tyres with forks Imperial

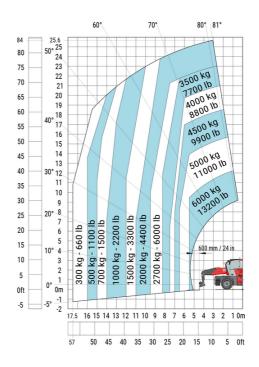


Machine on lowered stabilisers with forks (CAF) Metric


Machine on lowered stabilisers with forks (CAF) Imperial

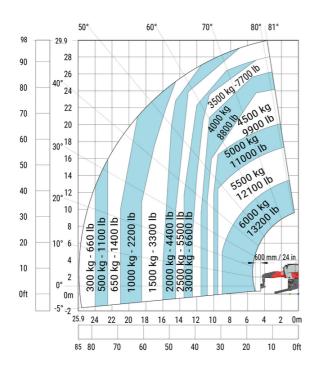

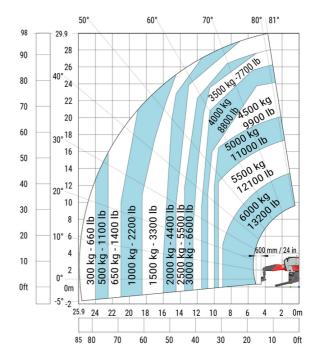


Machine on lowered stabilisers with winch 6000 kg (Metric) Machine on lowered stabilisers with winch 6000 kg (Imperial)

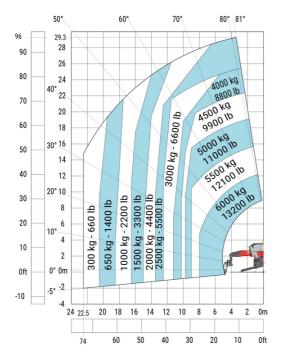


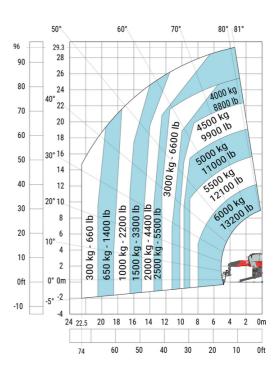

Machine on lowered stabilisers with 600 kg jib (Metric)


Machine on lowered stabilisers with 600 kg jib (Imperial)

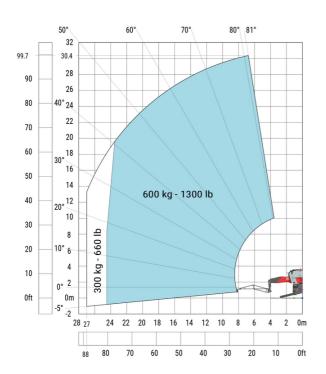


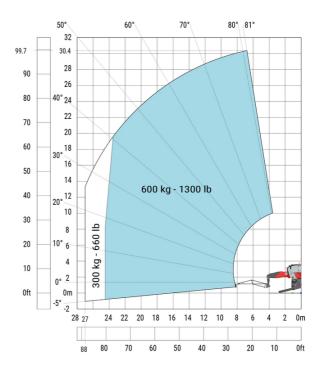

Machine on lowered stabilisers with 6000 kg jib (Metric)


Machine on lowered stabilisers with 6000 kg jib (Imperial)

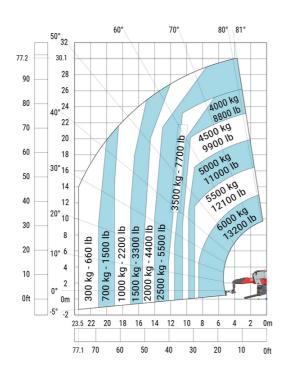


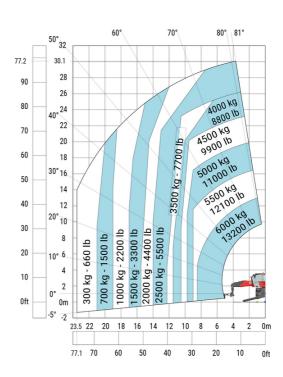


Machine on lowered stabilisers with 2000 kg jib with winch Machine on lowered stabilisers with 2000 kg jib with winch (Metric)


(Imperial)

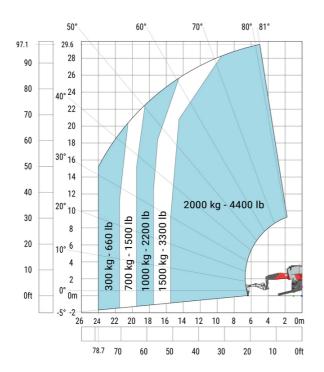

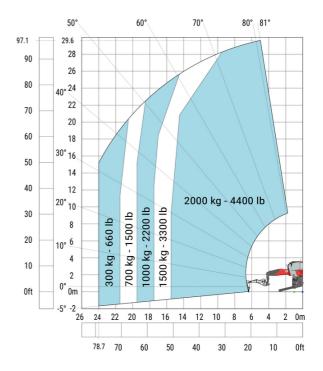


Machine on lowered stabilisers with 365 kg platform Metric Machine on lowered stabilisers with 365 kg platform **Imperial**

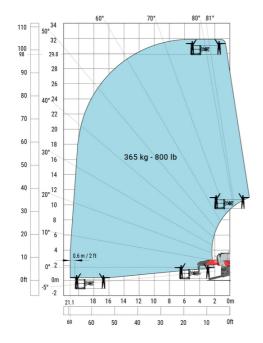


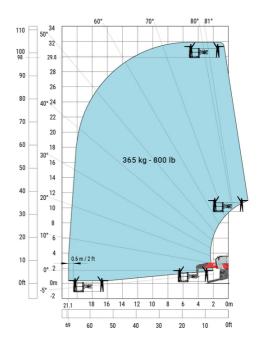

Machine on lowered stabilisers with 1000 kg platform Metric


Machine on lowered stabilisers with 1000 kg platform Imperial

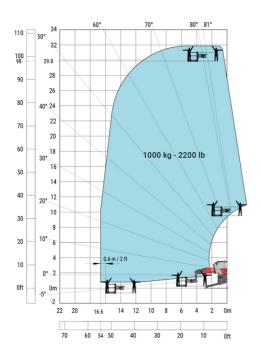


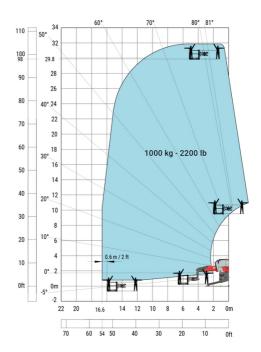


Machine on lowered stabilisers with 3D positive Metric

Machine on lowered stabilisers with 3D negative Metric

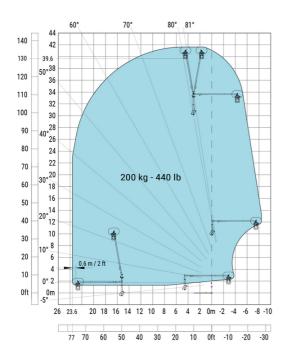

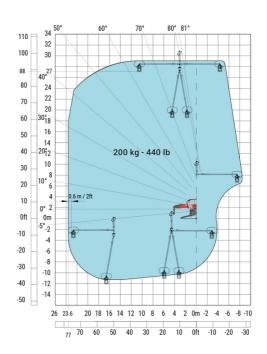

Machine on lowered stabilisers with 3D positive / negative Metric

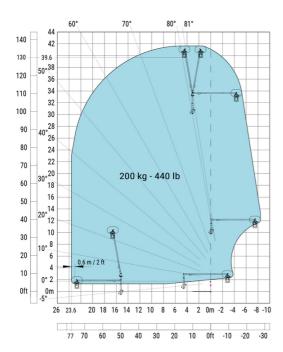





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes